# □□□□□ □□□□ □□ □□□ □□□□□ □□□□□□□□ □□□□□, □□□□□ □□□□□□□□ □□□□□□ □□□□□

## □□□□□□ □□□□□ □□ □□□□□□□□

| | |
|---|---|
| □□□□□□ □□ □□□ | □□□□□□□□□□ □□□□□ □□□□□□□□ □□□□□□ □□□□□ |
| □□□□□ □□oltage | □□□ 90-240V □□□□□ □□ □□□□ □□□ |
| □□□□□□□ □□oltage | □□□□ 24V |
| □□□□□□ □□□ (□□□□) | 120 |
| □□□□□ □□□ (□□□□) | 140 |
| □□□ □□□ (□□□□ / □□) | 30 |
| □□□□□□ □□□□□ | 10% □□□□□□ 2 □□□□, □□□□□□ □□□□□ |
| □□□□□ □□□□ | 620-1270□□□□ |
| □□□□□ □□□□ | 1100-1600mm |
| □□□ | □□□□, □□□□, □□□□□□□□ □□ □□□□□□ |
| □□□□□ □□□□□□□ | □□□□□□ □□□□□ Q235, □□□:□□□□□ □□□□□ |
| □□□□□□□□□□ | CE, □□, □0, **ROHS** |
| □□□□□ □□□□□Z□ □□□□□ □□□ | 1080 * 270 * 325 □□□□ |
| □□□ □□□ □□□□□ □□□ | 41kg |
| □□□ □□□ □□□□□ □□□ | 45kg |
| □□□□□□ □□□□□□ | □□ |
| □□□□□: | □□□□□ □□□□□ □□ □□□□□□□, □□ □□□□□ □□ □□□, □□□□□□ □□□□□□ □□ □□□ □□□ □□ □□□□ □□□ □□□□□, □□□□□□□ □□□ □□□□ □□□□□ □□ □□□□ □□□□ |

## □□□□□□ □□□□□ □□□□□:

□
□
□□□□□□□

## *A6* series

The appearance of the more beautiful
2 legs / 2 motors
Electric adjustable
Super mute motor synchronization control system
Colours can choose Frosted Black or Frosted White
Overload and overheat protection
The switch can press point move and press always move

Lifting range from 580mm-1240mm
Can use desktop from 1100mm-1600mm
Load capacity: 100kg / 225IBS
Load Speed: 30mm/s

High quality cold-rolled steel plate, the structure is strong
A number of patented technology

Voltage: 110 VAC /220 VAC
Gross weight: 38KG

## 5 Advantage

Out Tube size can be 90mmX60mm

Control box installation: Plug type
Patent design,It is more convenient

Foot to strengthen

Motor metal case Ultra-thin design

Control box patent design, Ultra-thin,small
Switching power supply
Metal case,have qualitative feeling
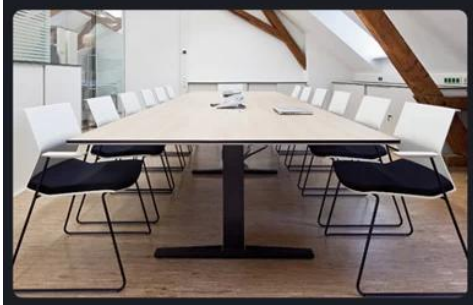
## Application